




LED it.

luminaire LED (W.122728)[®]
brands JBG- 2

STRONG, UNIFORM & ENERGY-SAVING LED LIGHTING

• low energy • low price • easy mounting • high efficiency level • lineal light distribution • standard 3 colours



JBG-2 luminaire LED (W.122728)[®]


length: 1225 mm 23W / 500 lux

Low-cost producer

length: 1225 mm 34W / 450 lux

Renowned manufacturer

length: 1200 mm 28W / 400 lux

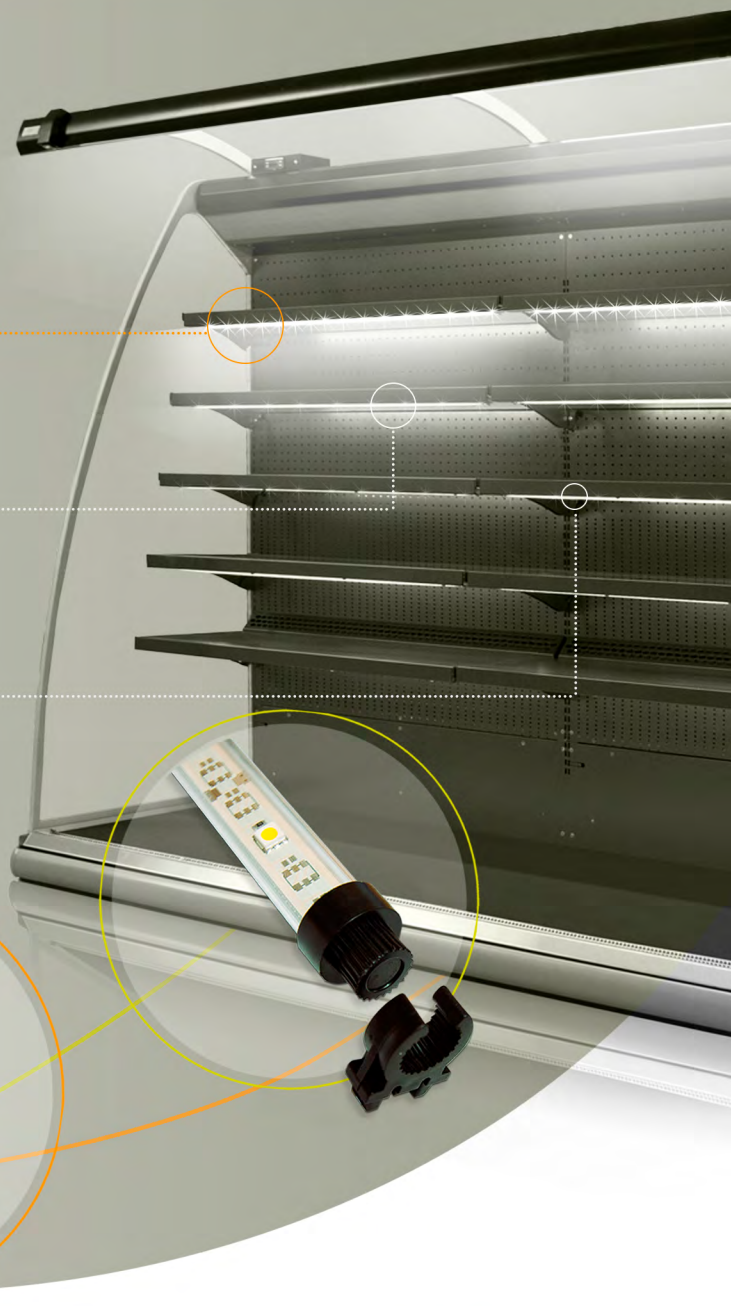



Solution developed & manufactured by



Lengths and features of luminaire (W.122728)® LEDit

Group	Type	Length [mm]	Colour	Number of LED/50mm	Power [W]
3,9 W/m	LEDit325-cc-1	325	NW, WW, NWR	1	1.4
	LEDit625-cc-1	625	NW, WW, NWR	1	2.9
	LEDit875-cc-1	875	NW, WW, NWR	1	4.1
	LEDit925-cc-1	925	NW, WW, NWR	1	4.3
	LEDit1025-cc-1	1025	NW, WW, NWR	1	4.8
9,4 W/m	LEDit1225-cc-1	1225	NW, WW, NWR	1	4.8
	LEDit325-cc-2	325	NW, WW, NWR	2	2.9
	LEDit625-cc-2	625	NW, WW, NWR	2	5.8
	LEDit875-cc-2	875	NW, WW, NWR	2	8.2
	LEDit925-cc-2	925	NW, WW, NWR	2	8.6
18,8 W/m	LEDit1025-cc-2	1025	NW, WW, NWR	2	9.6
	LEDit1225-cc-2	1225	NW, WW, NWR	2	11.5
	LEDit325-cc-4	325	NW, WW, NWR	4	5.8
	LEDit625-cc-4	625	NW, WW, NWR	4	11.5
	LEDit875-cc-4	875	NW, WW, NWR	4	16.3
	LEDit925-cc-4	925	NW, WW, NWR	4	17.3
	LEDit1025-cc-4	1025	NW, WW, NWR	4	19.2
	LEDit1225-cc-4	1225	NW, WW, NWR	4	23.0

Estimated yearly cost of electricity for lamp of similar size illuminance and power

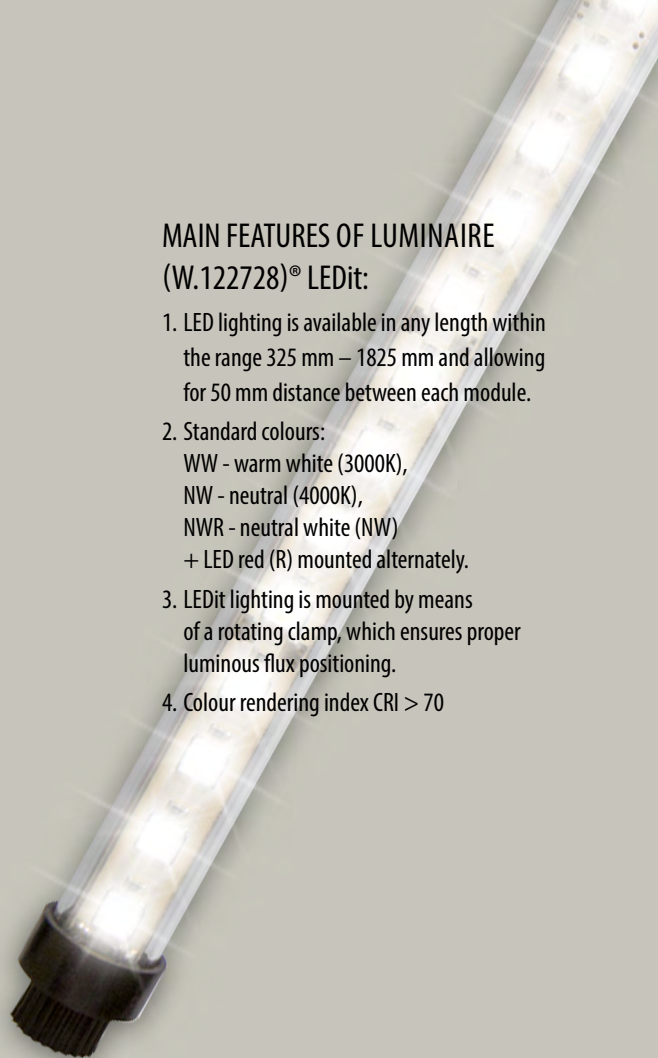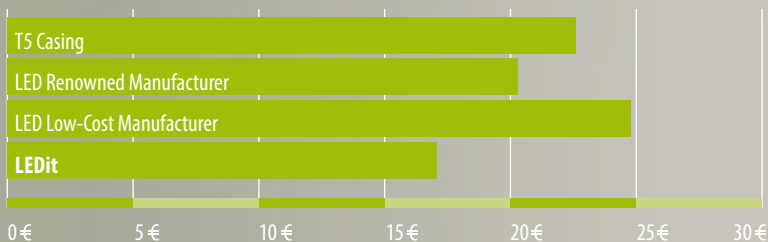

MAIN FEATURES OF LUMINAIRE (W.122728)® LEDit:

1. LED lighting is available in any length within the range 325 mm – 1825 mm and allowing for 50 mm distance between each module.
2. Standard colours:
 WW - warm white (3000K),
 NW - neutral (4000K),
 NWR - neutral white (NW)
 + LED red (R) mounted alternately.
3. LEDit lighting is mounted by means of a rotating clamp, which ensures proper luminous flux positioning.
4. Colour rendering index CRI > 70

JBG-2 Sp. z o.o.
 ul. Gajowa 5
 43-254 Warszowice
www.jbg2.com



DESCRIPTION OF LUMINAIRE

(W.122728)® LEDitxxx-cc-p:

xxx – length of LED lighting (in mm)

cc – light colour:

NW - 4000K (neutral white)

NW - 3000K (warm white)

NWR - 4000K + RED (for meat)

p – power of LED lighting:

1 – undershelf lighting 0.24 [W/50mm]

2 – counter, island lighting,
 underlighting 0.48 [W/50mm]

4 - main, canopy lighting 0.96 [W/50mm]

LEDit xxx
-NW-1



LEDit xxx
-NW-2



LEDit xxx
-NW-4



LEDit xxx
-NWR-4

